

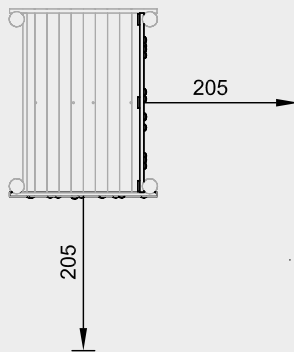



**Order No. 3.67505 / 3.67506**
**Climbing Walls**

for attachment to Platform 2.00 m  
short side / long side

**Order No. 3.67515 / 3.67516**
**Climbing Walls**

for attachment to Platform 1.50 m  
short side / long side


Safety distance →  
 Device dimensions —●—  
 Functional distance —|—

Scale 1:100

**Technical information**

Equipment made of non-impregnated mountain larch

**Core-free**

Sawn-timbers core-free, thus decreasing occurrences of cracking and undesired changes in shape


**Tongue and groove**

Tongue and groove planks made of 4 cm solid wood, highly resilient, no trickling of dust / sand, protection against direct rain


**For more detailed explanation of the quality characteristics see price list.**

Professional climbing grips made of a mixture of sand-synthetic resin with safe anti-rotation system against unintended twisting of the grips

**Dimensions**

(small deviations possible)

**Order No. 3.67505**

Height 2.00 m  
 Width 2.00 m

**Order No. 3.67506**

Height 2.00 m  
 Width 2.40 m

**Order No. 3.67515**

Height 2.30 m  
 Width 2.00 m

**Order No. 3.67516**

Height 2.30 m  
 Width 2.40 m

Safety check according to DIN EN 1176

**Components**
**Order No. 3.67505**

1 Climbing wall  
with 8 climbing grips

**Order No. 3.67506**

1 Climbing wall  
with 11 climbing grips

**Order No. 3.67515**

1 Climbing wall  
with 10 climbing grips

**Order No. 3.67516**

1 Climbing wall  
with 13 climbing grips


**Installation information**

Surfacing requirements  
 corresponding to a fall height of  
**Order No. 3.67505 / 3.67506** ≤ 2.00 m  
**Order No. 3.67515 / 3.67516** ≤ 3.00 m  
 (please refer to price list for more  
 detailed information)


**Attention:**

**Exact measurements may vary;**  
**for all installation dimensions refer**  
**to current assembly instructions.**


Technical changes reserved.




3.67505



3.67506




3.67515




3.67516


### Serpentine Ladder with Beam




**Order No. 3.69412**  
for Platform 1.50 m




**Order No. 3.69413**  
for Platform 2.00 m




### Climbing Rope with Beam




**Order No. 3.69451**  
for Platform 2.00 m




**Order No. 3.69452**  
for Platform 1.50 m




### Straight Firemen's Pole with Beam




**Order No. 3.69460**  
for Platform 1.50 m




for Platform 2.00 m




### Bent Firemen's Pole



**Order No. 3.69465**  
for Platform 1.50 m




**Order No. 3.69464**  
for Platform 2.00 m



Scale 1:100

Safety check according to DIN EN 1176

**Attention:**  
Exact measurements may vary;  
for all installation dimensions refer  
to current assembly instructions.  
Technical changes reserved.



3.69413



3.69451



3.69460



3.69464

### Technical information

**Order No.**  
**3.69412 / 3.69413 / 3.69451 / 3.69452**

#### Core-free

Sawn-timbers core-free, thus decreasing occurrences of cracking and undesired changes in shape



#### Richter Hercules type rope

Richter Hercules type rope, a combination of galvanised six-strand steel cables and polyester yarn, diameter > 20 mm, laid and glued with very good abrasion resistance, strong sheathing even in the case of damage by puncturing



#### Rope connection fixed

Fixed rope connection without dangerous openings. Screw connection adjustable and countersunk in the wood



#### Chains

Chains made of hot-dip galvanized steel (1.4301 / 1.4571 at extra charge) welded before galvanising, short-linked, without eyelets on the connecting parts, easy to exchange and shorten



Standard colour rope: rainbow

#### Order No. 3.69460

#### Core-free

Sawn-timbers core-free, thus decreasing occurrences of cracking and undesired changes in shape



#### Ground anchor

All parts used for anchoring to the ground are made of hot-dip galvanized steel or stainless steel



#### Order No. 3.69464

#### Ground anchor

All parts used for anchoring to the ground are made of hot-dip galvanized steel or stainless steel



**For more detailed explanation of the quality characteristics see price list.**

Firemen's poles made of stainless steel, glass bead blasted, Ø 42 mm

### Components

#### Order No. 3.69412 / 3.69413

1 Serpentine Ladder with beam and chain as anchoring to the ground each

#### Order No. 3.69451 / 3.69452

1 Climbing rope with beam and chain as anchoring to the ground each

#### Order No. 3.69460

1 Straight firemen's pole with beam

#### Order No. 3.69464

1 Bent fireman's pole

### Installation information

Surfacing requirements fall height determined by platform height (please refer to price list for more detailed information)

#### Foundations

#### Order No

**3.69412 / 3.69413 / 3.69451 / 3.69452**

1 item 30 x 30 x 30 cm

Excavation depth 50 cm

#### Order No 3.69460 / 3.69464

1 item 30 x 30 x 30 cm

Excavation depth 60 cm