Play value

This is a piece of equipment with the typical push and pull movements of sawing. It promotes movement and strengthening of the arms and shoulders. It is possible to hold with one or both hands; furthermore sawing can be done individually or with a partner. Angling the saw up or down also allows it to be used in different positions.







Recommended for


- School children
- Young people
- Adults
- Supervised play areas, such as schools, after-school programmes or similar
- Public play areas without supervision, such as playgrounds, parks or similar



Saw





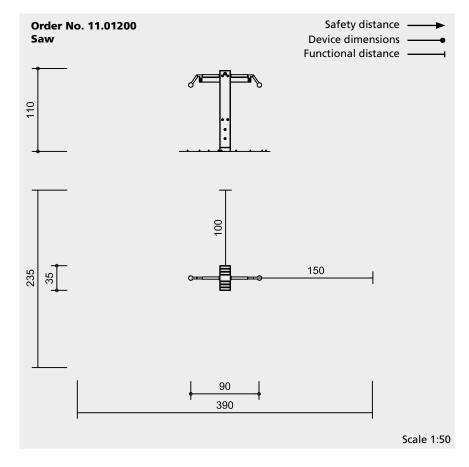

Components

1 Saw with 2 foundation anchors

Installation information

Surfacing requirements no requirements

Foundations 1 item 60 x 70 x 40 cm Excavation depth 60 cm

Attention:

Exact measurements may vary; for all installation dimensions refer to current assembly instructions. Technical changes reserved.

Technical information

Equipment made of non-impregnated mountain larch

Core-free

Sawn-timbers core-free, thus decreasing occurrences of cracking and undesired changes in shape



Adjustable

Adjustable two-piece bolt connection, easy to maintain, no projecting threads



HPL ground anchor

Foundation anchor made of phenol resin paper-based laminates



For more detailed explanation of the quality characteristics see price list.

Sandwich construction frame, oiled, non-positive fitting

Saw made of stainless steel

Handle balls made of polyamide

Dimensions

(small deviations possible)

Height	1.10 m
Width	0.90 m
Depth	0.35 m
Saw deflection	max. 0.50 m
Weight	approx. 80 kg

Safety

This equipment is not playground equipment within the scope of DIN EN 1176 and therefore is also not subject to the requirements of this standard. Nevertheless, it is complied with where appropriate.