

**Play value**

The versatile Play Block offers a range of different exercise and play activities and is an attractive meeting point for older children and teenagers. The large platform can only be reached through the chimney or the climbing poles, which is a real challenge. Sliding down on the long wave slide is great fun. The climbing wall is a special attraction; children like to test their strength and skills there.



© Richter Spielgeräte GmbH 08/24



**Play Block**

**Fundamental characteristics**


- Attractive meeting point
- A range of different exercise and play activities
- Incentive for playing: experiencing height, adventure
- Movement: climbing, physical effort, sliding, climbing up

**Recommended for**

- School children
- Young people
- Public play areas without supervision, such as playgrounds, parks or similar
- Swimming pools without supervision, such as outdoor pools, adventure pools or similar



7.78500

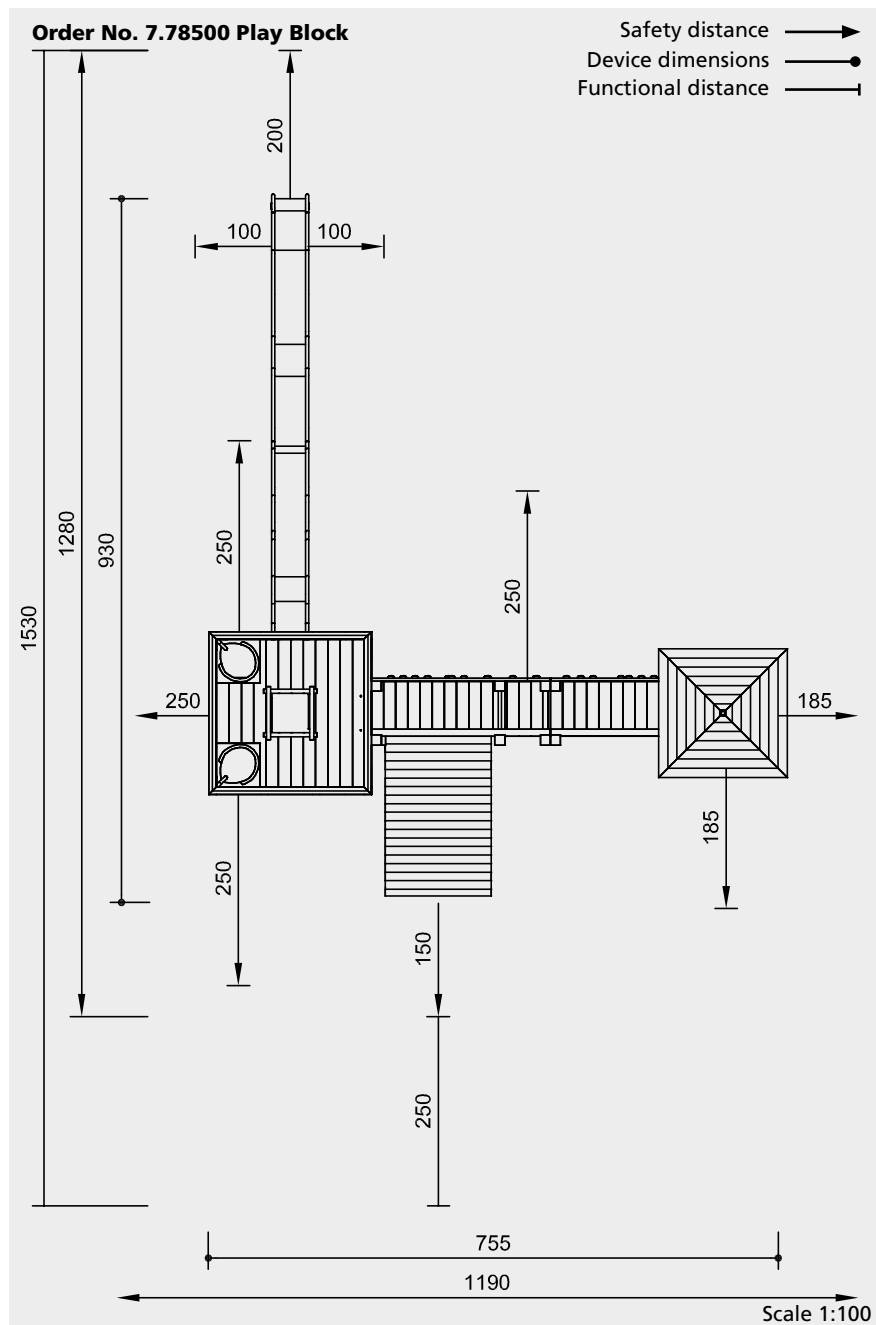

Safety check according to DIN EN 1176

### Components

- 1 Chimney with passageway to platform
- 1 Platform 2.15 x 2.15 m
- 2 Firemen's pole up to balustrade
- 1 Stainless steel slide with 1 wave and higher sides,  
**Order No 3.63225**
- 1 Two-part connecting structure with climbing wall
- 1 Firemen's pole
- 1 Inclined wall
- 1 Table
- 1 Bench
- 1 Square tower with raised roof



7.78500

### Installation information

Surfacing requirements corresponding to a fall height of  $\leq 3.00$  m (please refer to price list for more detailed information)

#### Foundations

##### Chimney

- 1 item 130 x 130 x 60 cm
- 2 items 50 x 50 x 60 cm

Excavation depth 80 cm

##### Inclined wall

- 2 items 50 x 50 x 40 cm

Excavation depth 60 cm

##### Tower

- 4 items 50 x 50 x 55 cm

Excavation depth 75 cm

##### Play block modules

- 4 items 50 x 120 x 60 cm

Excavation depth 80 cm

##### Slide

- 1 item 30 x 70 x 30 cm

Excavation depth 70 cm

##### Table

- 1 item 40 x 40 x 40 cm

Excavation depth 60 cm

### Technical information

Equipment made of non-impregnated mountain larch

#### Core-free

Sawn-timbers core-free, thus decreasing occurrences of cracking and undesired changes in shape



#### Claddings

Claddings made of mountain larch (4 – 5 cm). Peeled white by hand, natural tree surface remains tangible and perceptible



#### Tongue and groove

Tongue and groove planks made of 4 cm solid wood, highly resilient, no trickling of dust / sand, protection against direct rain



#### Hardwood rungs

Climbing rungs made of hardwood (ash)  $\varnothing$  4.2 cm, milled and mortised, secured against twisting, easy to grip and not cold for children to touch



#### Ground anchor

All parts used for anchoring to the ground are made of hot-dip galvanised steel or stainless steel



#### For more detailed explanation of the quality characteristics see price list.

Firemen's pole of stainless steel,  $\varnothing$  42 mm, glass bead blasted

Total construction of slides made of stainless steel with a 2-mm-thick sliding surface with higher glass-bead-blasted sides

Professional climbing grips made of a mixture of sand-synthetic resin with safe anti-rotation system against unintended twisting of the grips

#### Tower, refer to Order No. L3.20600

### Dimensions

(small deviations possible)

Chimney Slide	
Height	3.95 m
Floor height	3.00 m
Floor size	2.15 x 2.15 m
Tower	
Height	4.50 m
Floor heights	0.20 / 1.05 / 2.00 m
Connecting walkway	4.00 x 1.00 m
Inclined wall	
Install. height	2.00 m
Stainless steel slide	
Install. height	3.00 m
Width	0.45 m

#### Attention:

**Exact measurements may vary; for all installation dimensions refer to current assembly instructions.**

Technical changes reserved.