

# Instructions for wear checks of play equipment

The equipment must be checked for correct operation and safety, especially the points listed below:

Proof of maintenance

Playground.....

Date of installation .....


Checks depend on the type of equipment. Any equipment with moving parts must be checked at least twice a year, static equipment at least once a year.

Intervals for maintenance work and checks generally depend on


- location
- usage
- frequency of use
- possible vandalism

For more details see also our general instructions for maintenance of playgrounds!

**Spring Head with large flange**  
Order No. 5.18880

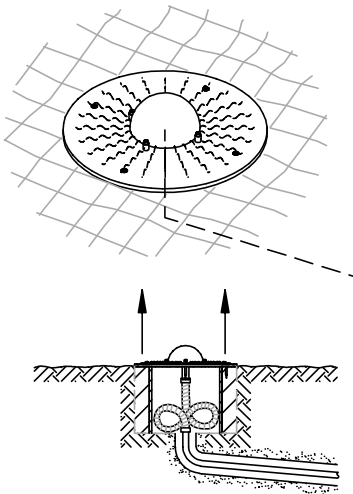

**Spring Head with small flange**  
Order No. 5.18885

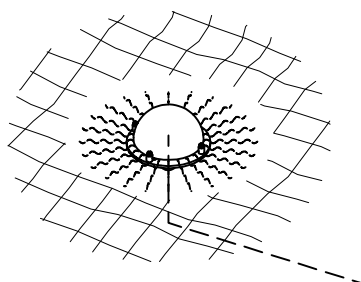

## Spring Head

1. Unscrew the flange and detach the spray-head from the water line.
2. Clean the shaft.
3. Rinse the sprayhead and, if necessary, unscrew the dome and remove dirt.
4. Reconnect the sprayhead to the water line and check for leaks.
5. Reattach dome and flange.

Special notes, e.g. for repairs	

Repair not carried out, it is still possible to play on equipment

Repair not carried out, equipment is taken out of action

All work carried out, everything is in order

Maintenance carried out by:

..... Date .....